


Unistrut Aisle Containment System™

with Cable Management

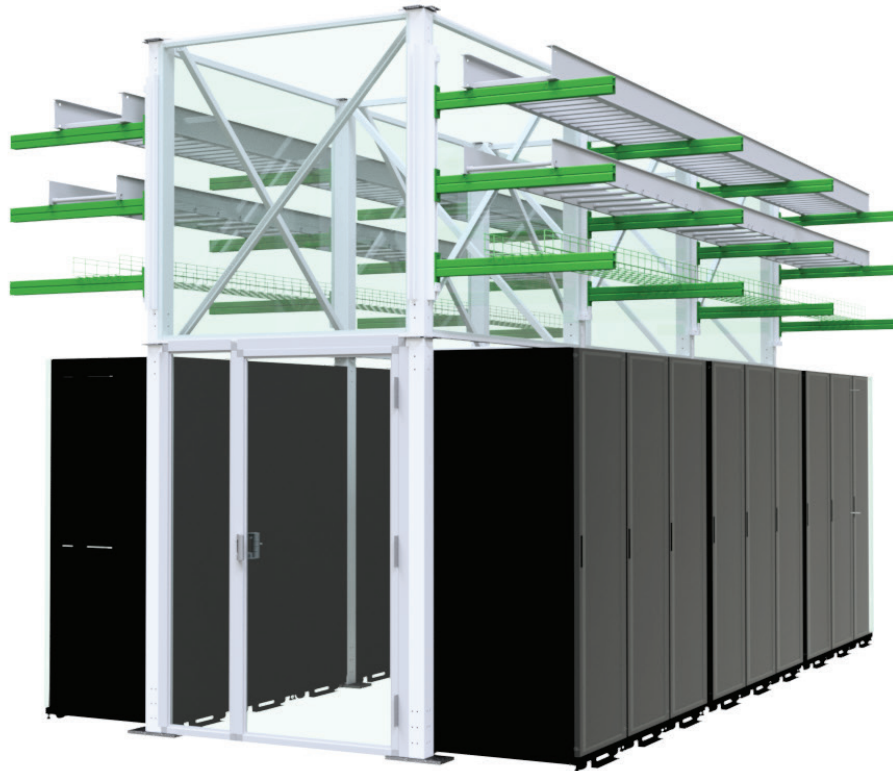

Atkore's Newest Datacenter Solution for Faster Installs

Let Atkore help reduce the complexity of your datacenter project by offering a fully designed and engineered system to meet your needs. This solution incorporates Atkore manufactured products to cut back on lead times and schedule delays which saves time and money. Our expert team of installers with years of experience in datacenters can build this modular structure offsite to reduce onsite congestion and potential safety hazards of traditional containment products.

Key Features

- Customized Configurations
- Modular Top Design
- Seismic Rating
- Installation Services
- Engineering & Design Services
- Made in USA

Product Options

- Height of Structure
- Width of Aisle
- Length of Aisle
- Number of Cantilever Arms
- Sliding or Swing Doors



For more info visit atkore.com/unistrutconstruction



Frame		
Physical Property	Material	Product
Columns	PG Steel	HSS 4x4
Arms	PG Steel GRADE 1008	Unistrut P1001
Door Assembly	Aluminum	Extrusion

Containment Panels - 6mm Twinwall Polycarbonate		
Flammability		
Property	Test	Result
Flame Spread	ASTM E84	<25
Smoke Developed	ASTM E84	<450

